



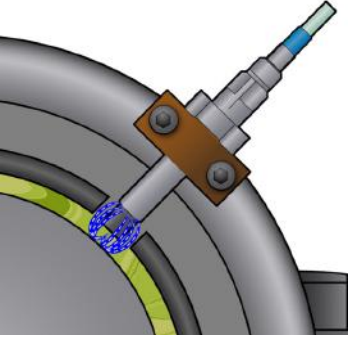
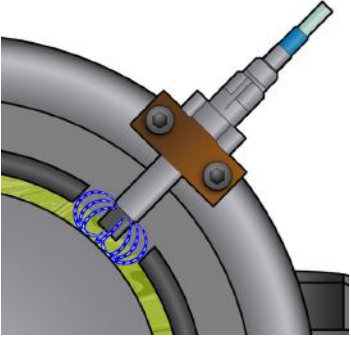
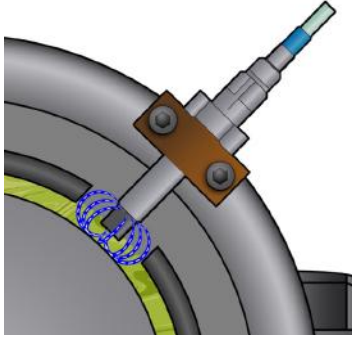



| | FFv PROBE TIP (5mm diameter) | 8mm PROBE TIP | 11mm PROBE TIP | 25mm PROBE TIP |
|-----------------------------|---|--|---|---|
| |  |  |  |  |
| PRO Model Number | DP1009 Series | DP1001 Series | DP1007 Series | DP100851 Series |
| Bently® Model Number | 3309 Series | 33010 Series | 3307 Series | 3308 Series |
| Linear Range | 10 to 70 mils (0.25mm to 1.75mm) | 10 to 90 mils (0.25mm to 2.30mm) | 20 to 180 mils (0.25mm to 4.57mm) | 25 to 525 mils (0.635mm to 13.33mm) |
| System Lengths | 5m or 7m | 5m or 9m | 5m or 9m | 5m or 9m |
| Sensitivity | 200 mV/mil (7.87 V/mm) | 200 mV/mil (7.87 V/mm) | 100 mV/mil (3.94 V/mm) | 20 mV/mil (0.787 V/mm) |
| Recommended Gap | 40 mils | 50 mils | 100 mils | 275 mils |
| Threaded Body Size | 1/4-28 M8x1 | 3/8-24 M10x1 | 1/2-20 M14x1.5 | 1 1/4-12 M30x2 |
| Common Applications | Steam turbines, pumps, gear boxes, motors, fans, general purpose | Steam turbines, pumps, gear boxes, motors, fans, general purpose | Hydro turbines, large displacement machines, general purpose | Axial thrust and differential expansion, general purpose |
| Eddy Current Field |  |  |  |  |