

Accelerometer Quick Disconnects




Product Features

Provides Convenient, Consistent Data Collection

CTC's Accelerometer Quick Disconnects are ideally suited for triaxial sensor use. They feature a convenient locating notch and an easy, quarter-turn connection.


MH106-1A

Quick Disconnect Receptacle with 10-32 Tapped Mounting Hole




MH107-1A

Quick Disconnect Receptacle with 1/4-28 Tapped Mounting Hole




MH107-1B

Quick Disconnect Mounting Stud

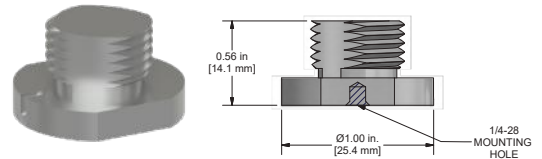


MH107-2B

Quick Disconnect Mounting Stud with 1/4-28 Threaded Mounting Bolt

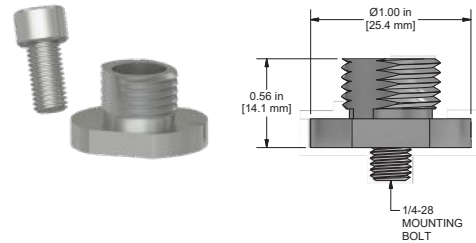

MH107-3B

Quick Disconnect Mounting Stud with M6 x 1 Threaded Mounting Bolt

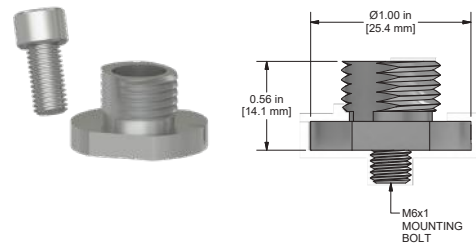

Component Specifications

Broad Frequency Response	0-390,000 CPM (0-6500 Hz)
Rugged	Engages five threads in 1/4 turn
Corrosion Resistant	316L Stainless Steel
Easy To Install	Quick Disconnect Stud may be epoxied and/or stud mounted
90 Degree Engagement	For accurate, repeatable readings with triaxial accelerometers

Backed by our Unconditional Lifetime Warranty
www.ctconline.com | sales@ctconline.com | 585-924-5900