

MH101-1B


Mounting Disk with 1/4-28 Integral Mounting Stud, 1" (25.4 mm) Diameter



VIBRATION ANALYSIS HARDWARE

Product Features

- ▶ Provides a consistent location for a permanent vibration reading location
- ▶ Adhesive Mount to avoid drilling and tapping
- ▶ Textured surface on bottom of pad for adhesive bonding

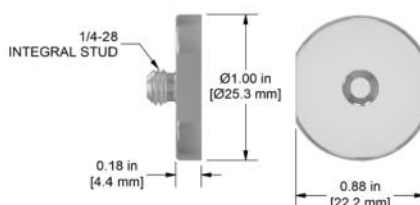

Specifications

Max Temperature	N/A
Case Material	316L Stainless Steel
Pull Strength	N/A
Sensor Mounting	1/4-28 Integral Stud

Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

Compatibility

- ▶ Compatible with all sensors with 1/4"-28 mounting holes

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

MH102-1A




VIBRATION ANALYSIS HARDWARE

Adhesive Mounting Disk for Magnet Target with 1/4-28 Integral Mounting Stud, 1" (25.4 mm) Diameter

Product Features

- ▶ Consistent measuring points for route based measurements
- ▶ Stud mount to machine allows better measurement accuracy
- ▶ Stainless Steel attracts magnetic mounting bases and also resists corrosion

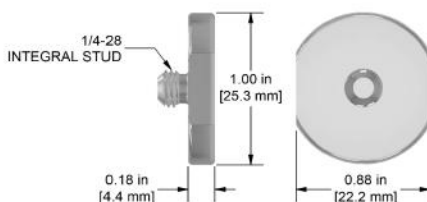

Specifications

Case Material	17-4 Stainless Steel
Sensor Mounting	1/4-28 Integral Stud

Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

Compatibility

- ▶ Compatible with all flat surface magnets that are 1 in. (25 mm) or less in diameter

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

MH130-1A

Mounting Disk with 1/4-28 Blind Tapped Hole, 1" (25.4 mm) Diameter




VIBRATION ANALYSIS HARDWARE



Product Features

- ▶ Provides a consistent location for permanent vibration measurement readings
- ▶ Stainless steel construction attracts to portable measurements and corrosion resistance
- ▶ Mounted with adhesive - no drilling and tapping required

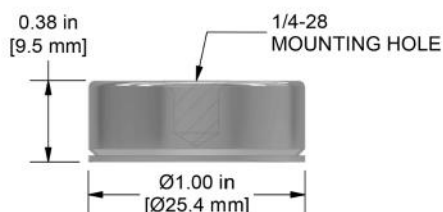

Specifications

Max Temperature	N/A
Case Material	17-4 Stainless Steel
Pull Strength	N/A
Sensor Mounting	1/4-28 Tapped Hole
Field Mounting	Epoxy (Sold separately)

Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

Compatibility

- ▶ Compatible with all sensors with 1/4"-28 mounting stud or bold
- ▶ Conversion mounting studs sold separately

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

MH130-1B

Mounting Disk with 1/4-28 Through-Hole, 1" (25.4 mm) Diameter




VIBRATION ANALYSIS HARDWARE



Product Features

- ▶ Consistent measurement locations for accurate trending
- ▶ Makes excellent target for magnet mounted sensors
- ▶ Simplifies process of permanent mounted sensors

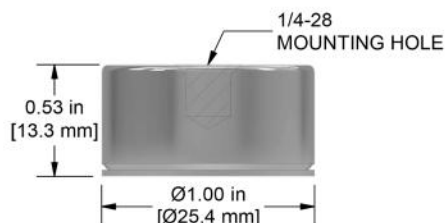

Specifications

Max Temperature	N/A
Case Material	17-4 Stainless Steel
Pull Strength	N/A
Sensor Mounting	1/4-28 Mounting Hole
Field Mounting	Epoxy (Sold Separately)

Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

Compatibility

- ▶ Conversion mounting studs available

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

MH130-1T


Mounting Disk with 1/4-28 Blind Tapped Hole and Triaxial Accelerometer Locating Notch, 1" (25.4 mm) Diameter



Product Features

Triaxial alignment notch ensures receptacle engagement with CTC triaxial accelerometers

- ▶ Provides a consistent location for permanent vibration measurement readings
- ▶ Stainless steel construction attracts to portable measurements and corrosion resistance
- ▶ Mounted with adhesive - no drilling and tapping required

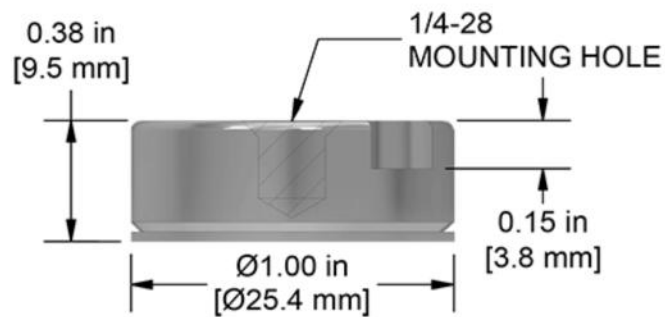

Specifications

Case Material	17-4 Stainless Steel
Sensor Mounting	1/4-28 Tapped Hole

Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

Compatibility

- ▶ Suited for CTC Triaxial accelerometers

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

MH130-2A




Mounting Disk with 10-32 Blind Tapped Hole, 1" (25.4 mm) Diameter

VIBRATION ANALYSIS HARDWARE



Product Features

- ▶ Provides a consistent location for permanent vibration measurement readings
- ▶ Stainless steel construction attracts to portable measurements and corrosion resistance
- ▶ Mounted with adhesive - no drilling and tapping required

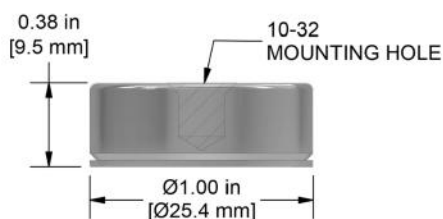

Specifications

Max Temperature	N/A
Case Material	17-4 Stainless Steel
Pull Strength	N/A
Sensor Mounting	10-32 Tapped Hole

Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

Compatibility

- ▶ Compatible with all sensors with 10-32 mounting stud or bolt
- ▶ Conversion mounting studs sold separately

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

MH130-3A

Mounting Disk with 1/4-28 Blind Tapped Hole, 1.25" (31.8 mm) Diameter




VIBRATION ANALYSIS HARDWARE



Product Features

- ▶ Provides a consistent location for permanent vibration measurement readings
- ▶ Stainless steel construction attracts to portable measurements and corrosion resistance
- ▶ Mounted with adhesive - no drilling and tapping required

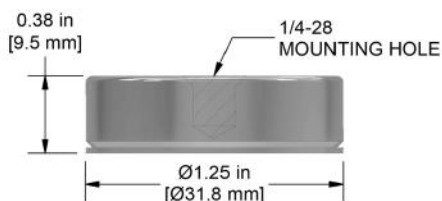

Specifications

Max Temperature	N/A
Case Material	17-4 Stainless Steel
Pull Strength	N/A
Sensor Mounting	1/4-28 Tapped Hole

Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

Compatibility

- ▶ Compatible with all sensors with 1/4"-28 mounting stud or bolt
- ▶ Conversion mounting studs sold separately

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

MH130-4A

Mounting Disk with 1/4-28 Blind Tapped Hole, 0.75" (19.1 mm) Diameter




VIBRATION ANALYSIS HARDWARE



Product Features

- ▶ Provides a consistent location for permanent vibration measurement readings
- ▶ Stainless steel construction attracts to portable measurements and corrosion resistance
- ▶ Mounted with adhesive - no drilling and tapping required

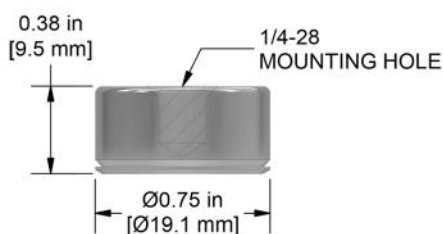

Specifications

Max Temperature	N/A
Case Material	17-4 Stainless Steel
Pull Strength	N/A
Sensor Mounting	1/4-28 Tapped Hole

Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

Compatibility

- ▶ Compatible with all sensors with 1/4"-28 mounting stud or bolt
- ▶ Conversion mounting studs sold separately

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

MH130-6A




Mounting Disk with M6x1 Blind Tapped Hole, 1" (25.4 mm) Diameter

VIBRATION ANALYSIS HARDWARE



Product Features

- ▶ Consistent measurement locations for accurate trending
- ▶ Makes excellent target for magnet mounted sensors
- ▶ Simplifies process of permanent mounted sensors

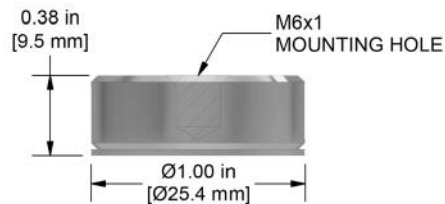

Specifications

Max Temperature	N/A
Case Material	Stainless Steel
Pull Strength	N/A
Sensor Mounting	M6x1 Tapped Hole

Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

Compatibility

- ▶ Suited for sensors with M6 captive bolt
- ▶ Conversion mounting studs available

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

MH130-8A

Mounting Disk with M8x1.25 Blind Tapped Hole, 1" (25.4 mm) Diameter




VIBRATION ANALYSIS HARDWARE



Product Features

- ▶ Consistent measurement locations for accurate trending
- ▶ Makes excellent target for magnet mounted sensors
- ▶ Simplifies process of permanent mounted sensors

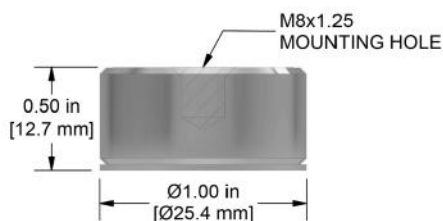

Specifications

Max Temperature	N/A
Case Material	17-4 Stainless Steel
Pull Strength	N/A
Sensor Mounting	M8x1.25 Tapped Hole

Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

Compatibility

- ▶ Suited for CTC MH108-25B
- ▶ Conversion mounting studs available

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

MH133-1A


Low Profile Magnet Mounting Target, 1" (25.4 mm) Diameter, 0.25 in (6.3 mm) Height, Laser Engraved "Vibration Test Point"



VIBRATION ANALYSIS HARDWARE

Product Features

- ▶ Consistent measurement locations for accurate trending
- ▶ Epoxy Catch bottom texture
- ▶ Low Cost



Specifications

Max Temperature	N/A
Case Material	17-4 Stainless Steel
Pull Strength	N/A
Field Mounting	Adhesive Mounting Surface

Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

Compatibility

- ▶ Compatible with all magnets

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

MH138-1A


Mounting Disk with Double Sided 1/4-28 Integral Mounting Studs,
1" (25.4mm) Diameter



VIBRATION ANALYSIS HARDWARE

Product Features

- ▶ Provides a consistent location for a permanent vibration reading location
- ▶ Stud mounted on both sides

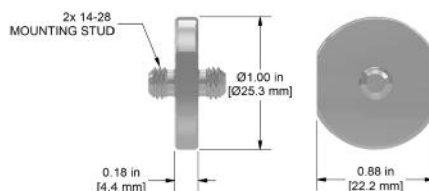

Specifications

Max Temperature	N/A
Case Material	316 L Stainless Steel
Pull Strength	N/A
Sensor Mounting	1/4-28 Integral Studs

Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

Compatibility

- ▶ Compatible with all sensors with 1/4"-28 mounting holes

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

MH150-1A

Magnet Mounting Target, 17-4 Stainless Steel, 1.5" (38.1 mm) Diameter, Laser Engraved "Vibration Test Point"




VIBRATION ANALYSIS HARDWARE



Product Features

- ▶ Consistent measurement locations for accurate trending
- ▶ Epoxy Catch bottom texture
- ▶ Low Cost

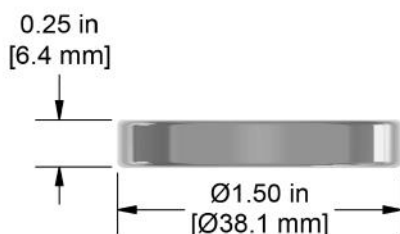

Specifications

Case Material	17-4 Stainless Steel
Field Mounting	Adhesive Mounting Surface

Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

Compatibility

- ▶ Compatible with all magnets

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900


MH151-1A

Electrically Isolated Mounting Pad, Double Sided 1/4-28 Blind Tapped Holes, 1" (25.4 mm) Diameter



Product Features

- ▶ Isolates sensors from electrical shock
- ▶ Isolated up to 2,000 volts

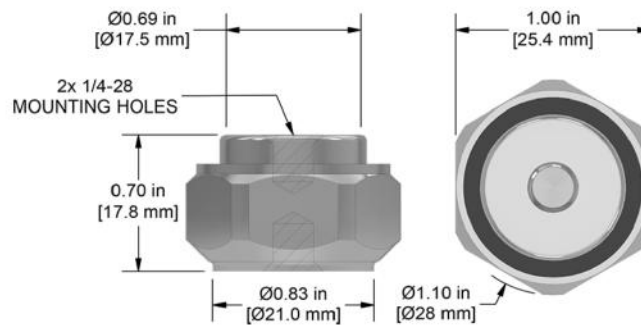

Specifications

Max Temperature	N/A
Case Material	17-4 Stainless Steel and Epoxy
Pull Strength	N/A
Sensor Mounting	1/4-28 Tapped Hole
Field Mounting	1/4-28 Tapped Hole

Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

Compatibility

- ▶ Compatible with all sensors with 1/4-28 mounting stud or bolt
- ▶ Conversion mounting studs sold separately

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900