

# CK-SF Series

Field Installable Safety Feature Connector Kit, for use with 2 Conductor Cables, 250 °F (121 °C) Max Temp




VIBRATION ANALYSIS HARDWARE

## Product Features

Field Installable Safety feature connector kit

For use with 2 conductor cables

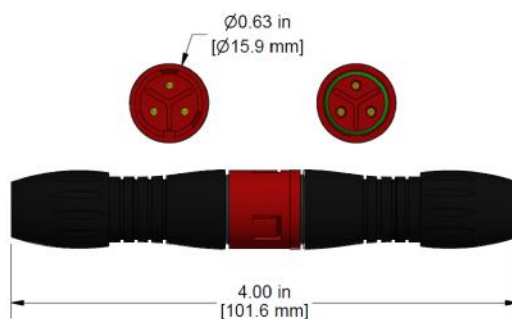

### Specifications

Application	Portable Monitoring
Max Temperature	250 °F (121 °C)
Connector Type	Safety Feature
Shell Material	Nylon
Rating	UL94 V-0
Pin-Out	Pin 1: Signal (+) Pin 2: Common (-) Pin 3: Shield

Stock Product

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900

# CK-SFT Series


Triaxial Break Away Safety Connector Kit, Field Installable, 250 °F  
(121 °C) Max Temp



VIBRATION ANALYSIS HARDWARE

## Product Features

Field Installable Safety feature connector kit  
For use with 3/4 conductor cable

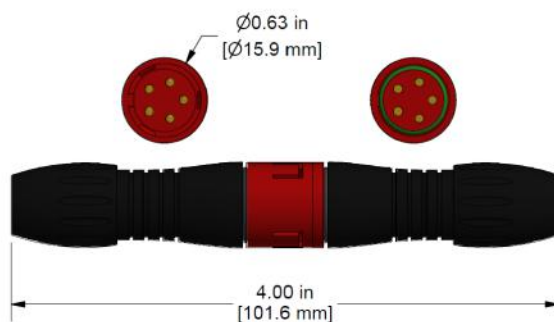

## Specifications

Application	Portable Monitoring
Max Temperature	250 °F (121 °C)
Connector Type	Safety Feature
Shell Material	Nylon
Rating	UL94 V-0
Pin-Out	Pin 1: Y Axis (+) Pin 2: X Axis Pin 3: Z Axis (+) Pin 4: Common (-) Pin 5: Shield

Stock Product

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900

# SFP Series


3 Pin Break-Away Safety Feature Connector, for use with 2 Conductor Cables, 250 °F (121 °C) Max Temp



## Product Features

### Sensor Side

- ▶ For use with SFS
- ▶ Formerly C372
- ▶ \*Image shows full safety feature (SFS and SFP)

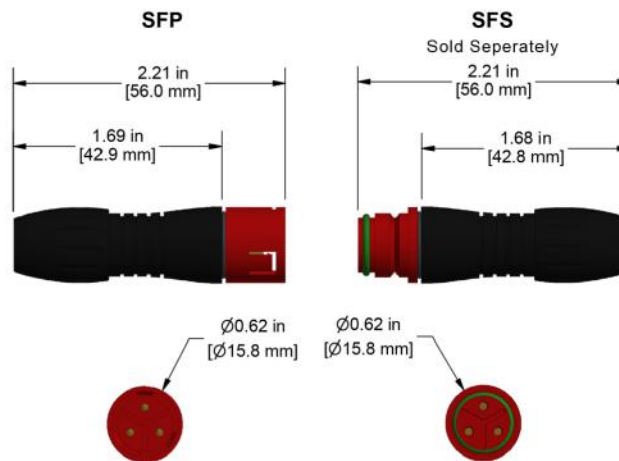

## Specifications

Application	Portable Monitoring
Max Temperature	250 °F (121 °C)
Connector Type	Safety Feature
Shell Material	Nylon
Rating	UL94 V-0
Pin-Out	Pin 1: Signal (+) Pin 2: Common (-) Pin 3: Shield

Built to Order

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900

# SFS Series


3 Socket Break-Away Safety Feature Connector, for use with 2 Conductor Cables, 250 °F (121 °C) Max Temp



## Product Features

### Data Collector Side

- ▶ For use with SFP
- ▶ Formerly C371
- ▶ \*Image shows full safety feature (SFS and SFP)

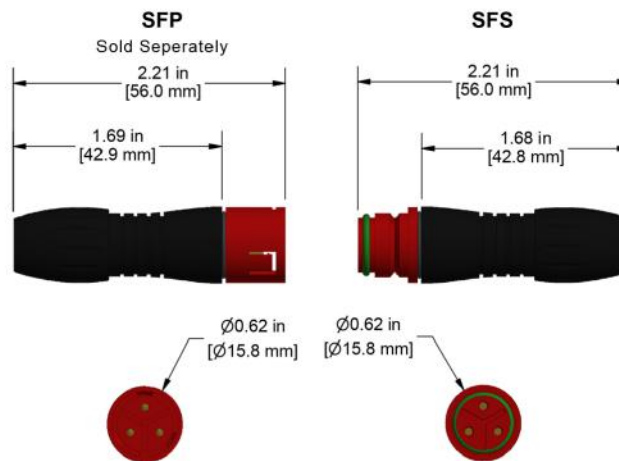

## Specifications

Application	Portable Monitoring
Max Temperature	250 °F (121 °C)
Connector Type	Safety Feature
Shell Material	Nylon
Rating	UL94 V-0
Pin-Out	Pin 1: Signal (+) Pin 2: Common (-) Pin 3: Shield

Built to Order

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900

# SFTP Series



5 Pin Break-Away Safety Feature Connector for use with Sensor Side of Cable Assemblies

VIBRATION ANALYSIS HARDWARE

## Product Features


### Sensor Side

For use with 3/4 conductor cable

- ▶ For use with SFTP
- ▶ Formerly C472
- ▶ \*Image shows full safety feature (SFTS and SFTP)






### SFTP



### SFTS

Sold Separately



## Specifications

Application	Portable Monitoring
Max Temperature	250 °F (121 °C)
Connector Type	Safety Feature
Shell Material	Nylon
Rating	UL94 V-0
Pin-Out	Pin 1: Y Axis (+) Pin 2: X Axis Pin 3: Z Axis (+) Pin 4: Common (-) Pin 5: Shield

Built to Order

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900

# SFTS Series

5 Socket Break-Away Safety Feature Connector for use with Data Collector Side of Cable Assemblies



## Product Features

### Data Collector Side


For use with 3/4 conductor cable

- ▶ For use with SFTP
- ▶ Formerly C471
- ▶ \*Image shows full safety feature (SFTS and SFTP)






### SFTP

Sold Separately



### SFTS



## Specifications

Application	Portable Monitoring
Max Temperature	250 °F (121 °C)
Connector Type	Safety Feature
Shell Material	Nylon
Rating	UL94 V-0
Pin-Out	Pin 1: Y Axis (+) Pin 2: X Axis Pin 3: Z Axis (+) Pin 4: Common (-) Pin 5: Shield

Built to Order

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900