

C22 Series



VIBRATION ANALYSIS HARDWARE

Entek/IRD dataPAC Compatible, 7 Pin LEMO Connector, Single Channel Acceleration Input, Pin 2 Signal/Power (+), Pin 5 Common (-)

Product Features

- ▶ 7 Pin LEMO Connector for Single Channel Acceleration Input
- ▶ Case Grounded



Ø0.5 in [12.7 mm]



2.8 in [71.1 mm]



Specifications

Application	Portable Monitoring
Connector Type	7 Pin LEMO
Shell Material	Brass
Rating	IP66 Rated
Pin-Out	Pin 2: Signal/Power (+) Pin 5: Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

C46 Series




VIBRATION ANALYSIS HARDWARE

Entek/IRD dataPAC Compatible, 7 Socket Lemo Connector, Single Channel Acceleration Input, Mates with C22 Connector, Pin 2 Signal/Power, Pin 5 Common (-)

Product Features

- ▶ 7 Socket Lemo Connector for Single Channel Acceleration Input
- ▶ Mates with C22 Connector

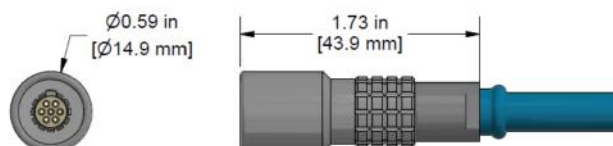

Specifications

Application	Portable
Connector Type	7 Socket Lemo Connector
Pin-Out	Pin 2: Signal/Power Pin 5: Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

C316 Series




VIBRATION ANALYSIS HARDWARE

Datapak/Enpac Compatible, 7 Pin LEMO Connector, Triaxial Acceleration Input, Pin 2 (Y Axis), Pin 3 (X Axis), Pin 5 Common (-), Pin 6 (Z Axis)

Product Features

- ▶ 7 Pin LEMO Connector for Triaxial Acceleration Input

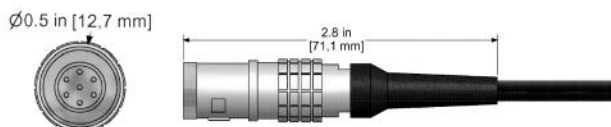

Specifications

Application	Portable Monitoring
Connector Type	7 Pin LEMO
Shell Material	Brass
Rating	IP66 Rated
Pin-Out	2 = Y Axis Signal/Power 3 = X Axis Signal/Power 5 = Common (-) 6 = Z Axis Signal/Power

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

C368 Series

Enpac 1500/1200 Compatible, 7 Pin Fischer Connector, Single Channel Tachometer Input, Pin 4 Common (-), Pin 6 Tachometer/Power (+)



VIBRATION ANALYSIS HARDWARE

Product Features

- ▶ 7 Pin Fischer Connector for Single Channel Tachometer Input



Ø0.35 in
[Ø8.8 mm]



1.29 in
[32.8 mm]



Specifications

Application	Portable Monitoring
Connector Type	7 Pin Fischer
Shell Material	Steel
Rating	IP66 Rated
Pin-Out	Pin 4: Common (-) Pin 6: Signal/Power (+)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

CK-C1 Series

7 Pin ENTEK / IRD Connector Kit, 250 °F (121 °C) Max Temp



Product Features

- ▶ For use with Rockwell/Entek Dataline® Data Collector
- ▶ Epoxy kit (MH109-3D) sold separately



Specifications

Max Temperature	250 °F (121 °C)
Shell Material	Aluminum Alloy
Connector Insert Material	Polychloroprene
Rating	IP66
Pin-Out	Pin 1: Common (-) Pin 2: Power (+)

Stock Product

Backed by our Unconditional Lifetime Warranty
www.ctconline.com | sales@ctconline.com | 585-924-5900