

PM130 Series

Fiberglass Enclosures for vbOnline™ with 12 Sensor Inputs




Product Features

Custom Designed Enclosure

Mounts Commtest® vbOnline™ PRO systems for a centralized data transmission location

- ▶ Designed for mounting a vbOnline™ machine surveillance system and managing the wiring for sensor, tachometers and digital inputs
- ▶ Protection from dirt, dust, oil and water, while window unit provides viewing area for vbOnline™ in the fiberglass enclosure.
- ▶ DC power supply included with each enclosure

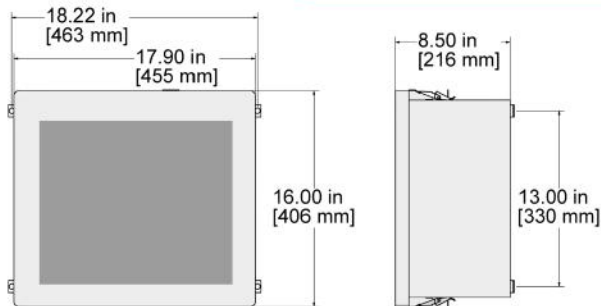

Specifications

Enclosure Material	Fiberglass Enclosure with 304 Stainless Steel Wall Mounting Feet and Back Plate 10-32 Stainless Steel screws UV Resistant Polycarbonate Viewing Window
Rating	NEMA 4X (IP66 Equivalent) UL 508, Type 1, 2, 3, 3R, 4, 4X, 12, 13 CSA Certified LR 89590 for use with industrial control equipment CSA Enc.1, 2, 3, 4, 4X, 12, 13
Door Closure	304 Stainless Steel Snap Latches feature padlock hasp Continuous Stainless Steel hinge Closed cell neoprene cord encased in continuous channel
Dimensions	18.22 x 16.00 x 13.00 in (463 x 406 x 330 mm)
Cord Grips	0.118 - 0.256 inches (3,0 - 6,5 mm)
Resistance	Resistant to Hose Directed Fluid and Corrosion

Ordering Information

PM 1 3 0 - 1 2 -

Enclosure Type 130 = Fiberglass	Channels 12 = 12 Channels	Input Options A = User Defined B = Conduit Fitting C = Cord Grip D = Cord Grip, with Additional Cord Grips for Tachometer Inputs	Output Options A = User Defined B = Conduit Fitting
---	-------------------------------------	---	--

Options highlighted in red are Stock Products, all other options are Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900