

C4 Series


SKF CMVA Series Compatible, 25 Pin D Subminiature Connector, Single Axis Acceleration Input



VIBRATION ANALYSIS HARDWARE

Product Features

- ▶ For use with SKF acceleration input, CMVA series



Specifications

Application	Portable Monitoring
Connector Type	25 Pin Subminiature
Shell Material	Thermoplastic
Connector Insert Material	Steel
Rating	IP66 Rated
Pin-Out	20 = Common (-) 22 = Signal/Power (+)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

C66 Series



VIBRATION ANALYSIS HARDWARE

SKF CMXA and DLI/DCA Series Compatible, 6 Pin Fischer Connector, Single Channel Acceleration Input, Pin 1 Signal/Power (+), Pin 5 Common (-)

Product Features

- ▶ 6 Pin Fischer Connector for Single Channel Acceleration Input
- ▶ Compatible Connectors: J2C, A2R, B2A, D2CG, K2C, A2Y, C372, C371, E, F, FX
- ▶ Case Grounded



Specifications

Application	Portable Monitoring
Connector Type	6 Pin Fischer® connector
Strain Relief	Heat Shrink
Shell Material	Aluminum
Rating	IP 66 Rated
Pin-Out	1 = Signal/Power (+) 5 = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

C325 Series




VIBRATION ANALYSIS HARDWARE

SKF DLI/DCA-31 Compatible, 6 Pin Fischer Connector, Triaxial Acceleration Input, Pin 1 (Y Axis), Pin 2 (X Axis), Pin 5 Common (-), Pin 6 (Z Axis)

Product Features

- ▶ 6 Pin Fischer Connector for Triaxial Acceleration Input

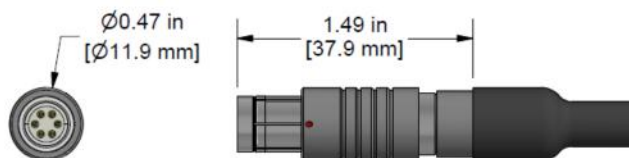

Specifications

Application	Portable Measurements
Connector Type	6 Pin Fischer Connector
Rating	IP66
Pin-Out	Pin 1 (Y Axis) Pin 2 (X Axis) Pin 5 Common (-) Pin 6 (Z Axis)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

C364 Series



SKF Microlog Compatible, 7 Pin Fischer Connector, Single Channel
Tachometer Input, Pin 4 Common (-), Pin 6 Signal/Power (+)



VIBRATION ANALYSIS HARDWARE

Product Features

- ▶ 7 Pin Fischer Connector for Single Channel Tachometer Input



Specifications

Application	Portable Monitoring
Connector Type	7 Pin Fischer
Shell Material	Brass
Rating	IP66 Rated
Pin-Out	4 = Common (-) 5 = Signal/Power (+)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

C484 Series




VIBRATION ANALYSIS HARDWARE

SKF DLI/DCA-31 Compatible, 6 Pin Fischer Connector, Triaxial Acceleration Input, Pin 1 (X Axis), Pin 2 (Y Axis), Pin 5 Common (-), Pin 6 (Z Axis)

Product Features

- ▶ 6 Pin Fischer Connector for Triaxial Acceleration Input

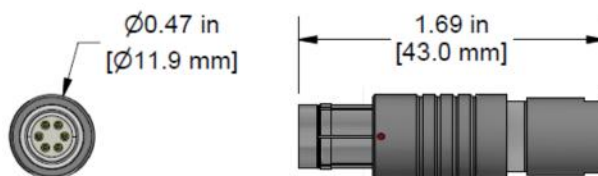

Specifications

Application	Portable Measurements
Connector Type	6 Pin Fischer Connector
Rating	IP66
Pin-Out	Pin 1 (X Axis) Pin 2 (Y Axis) Pin 5 Common (-) Pin 6 (Z Axis)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

C516 Series




VIBRATION ANALYSIS HARDWARE

SKF CMXA and DLI/DCA Series Compatible, 6 Socket Fischer® Connector, Wired to mate with C66 (6 Pin Fischer®), Single Channel Acceleration Input

Product Features

SKF CMXA and DLI/DCA Series Compatible

▶ Mates with C66

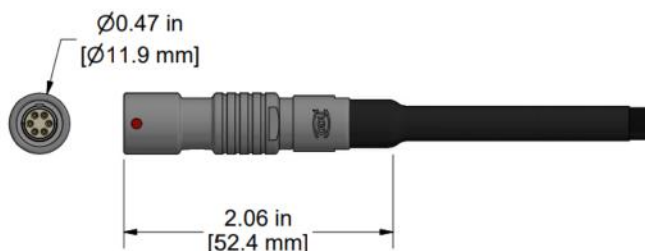

Specifications

Application	Portable Monitoring
Connector Type	6 Socket Fischer® Connector
Strain Relief	Heat Shrink
Rating	IP66 Rated
Pin-Out	1 = Signal/Power (+) 5 = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900